


MAIN PARTS AND MATERIALS

NO.	PART NAME	MATERIAL	NO.	PART NAME	MATERIAL
1	Nut	304	7	Thrust Gasket	PTFE
2	Spring Washer	304	8	Bonnet	WCB/CF8/CF8M
3	Stem	304/316	9	Gasket	PTFE
4	Handle	201+PVC	10	Seat	PTFE
5	Gland Nut	304	11	Ball	304/316
6	Packing	PTFE	12	Body	WCB/CF8/CF8M

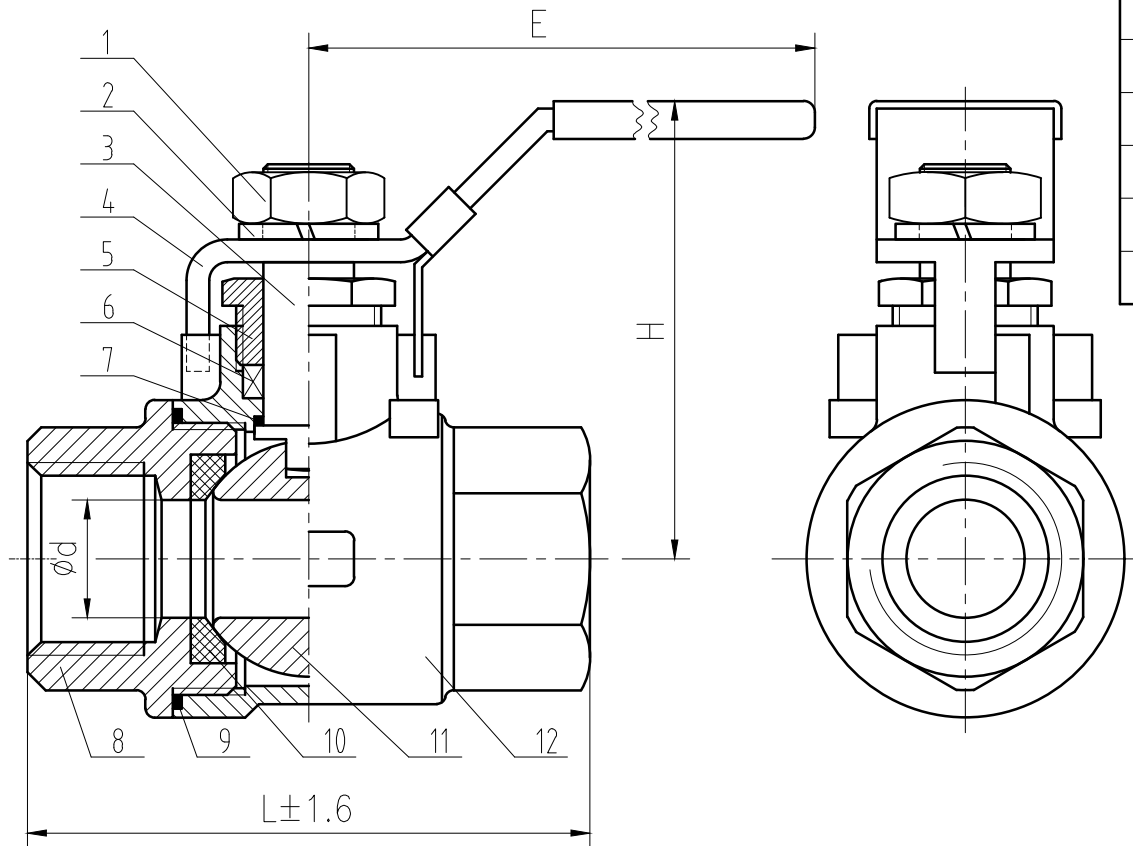

CONFIGURATION DIMENSION

	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
d	8	10	15	20	25	32	38	49
L	52	52	64	72	83	96	103	123
H	55	55	55	60	70	75	90	100
E	90	90	105	115	120	145	175	175

Please note: This Drawing for reference only.

Technical Requirements

1. Design & manufacture conform to GB/T 12224
2. Test & Inspect conform to GB/T 26480
3. Face to Face dimension conforms to Manufacturer's standard
4. END dimension conforms to GB/T7306 ,GB/T7307

Main Technical Parameter					
Nominal pressure		1000PSI			
Test pressure	Shell	10.4	Mpa	ASSEMBLY DRAWING	
	High-Pressure Closure	7.6		2PC ball valve	
	Low-Pressure Closure	0.4~0.7			
Applicable temperature		-29~120℃			
Applicable medium:water,oil,gas					