


MAIN PARTS AND MATERIALS

NO.	PART NAME	MATERIAL	NO.	PART NAME	MATERIAL
1	Nut	304	8	On Seat	PTFE
2	Spring Washer	304	9	Body	WCB/CF8/CF8M
3	Handle	201+PVC	10	Lock Nut	304
4	Gland	304	11	Washer	304
5	Packing	PTFE	12	Ball	304/316
6	Thrust Gasket	PTFE	13	Next Seat	PTFE
7	Stem	304/316	14		

CONFIGURATION DIMENSION

	1/4"	3/8"	1/2"	3/4"	1"	1¼"	1½"	2"	2½"	3"	4"
d	5	7	9	12	15	20	25	32	38	50	65
H	32	32	36	38	45	55	60	63	95	100	130
E	72	72	95	100	115	125	125	140	175	175	235
L	40	44	54	59	71	78	84	101	120	140	185

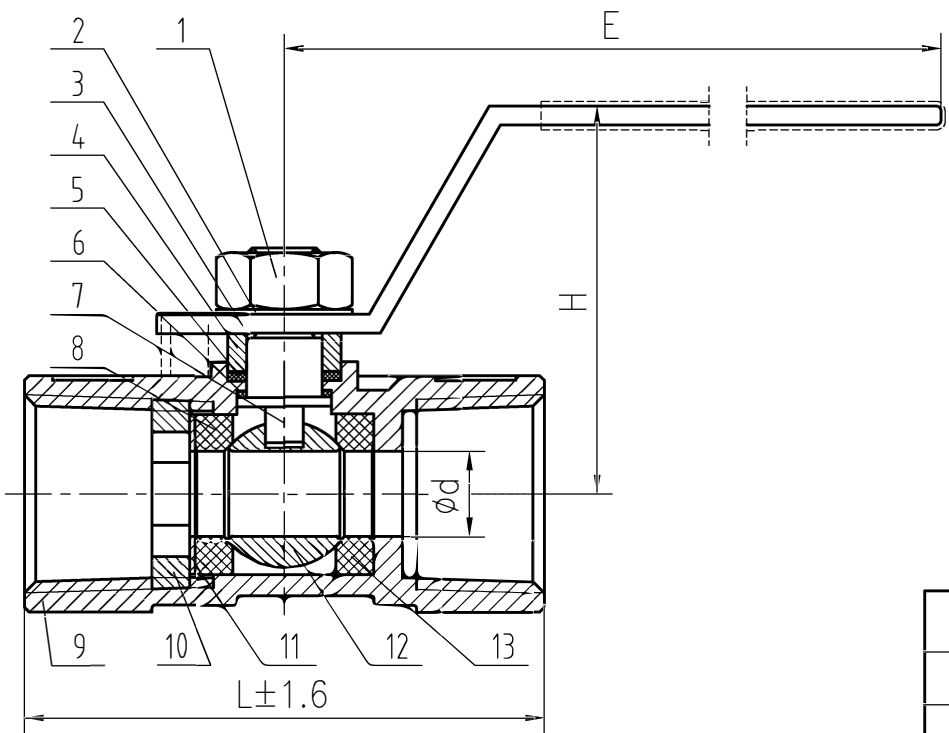

Please note: This Drawing for reference only.

Main Technical Parameter				ASSEMBLY DRAWING 1PC ball valve	
Nominal pressure		1000PSI			
Test pressure	Shell	10.4	Mpa		
	High-Pressure Closure	7.6			
	Low-Pressure Closure	0.4~0.7			
Applicable temperature		-29~120℃			
Applicable medium:water,oil,gas					